



The T2 Flex PARCS solution includes high-quality, reliable revenue control equipment including ticket dispensers, credit card entry and exit stations and pay-on-foot stations.

T2 Revenue Control Hardware: Entry Station

Description

The T2 entry stations have been developed for use with the T2 Flex parking management system software. As tickets are issued, they are encoded with all of the necessary transaction data including time, date, ticket sequence number, entry lane number and site number.

Housing

The T2 entry station utilizes a simplified modular design to facilitate easy maintenance and servicing. For extreme durability and corrosion resistance, the housing is constructed from 14 gauge galvanized, phosphate treated sheet steel with a stainless steel base. For added strength, the housing is powder coated with RAL 2000 polyester powder.

Technology

The T2 ticket dispenser uses a high quality stainless steel ticket head to provide the robustness required in sometimes harsh outdoor parking environments. Using industry standard credit card size ticket stock, the T2 unit can feed, cut, encode, print and issue a machine-readable parking ticket in less than 2 seconds.

In addition, the dispenser supports a variety of loop configurations to fit various application and audit requirements. For example, if a patron backs out of the entry lane without taking the issued ticket, the entry station will retract the ticket and drop it in a secure holding bin.





On-Line

The T2 Entry Station provides transaction and unit status to the T2 Flex software in real-time. The unit will provide the following information: low ticket stock, ticket issue status, stolen ticket, access system entry as well as gate status.

Technical Data - Model #T21MA275A1


Display	4x20 character	Backlit
Voltage	115	VAC
Frequency	60	Hz
Power Consumption	600	W
Ticket Thickness	.15 to .30	
Ticket Capacity	5,000	
Printer	Black or 1 color	
Environmental	-4 to +104	F
Weight	100	pounds

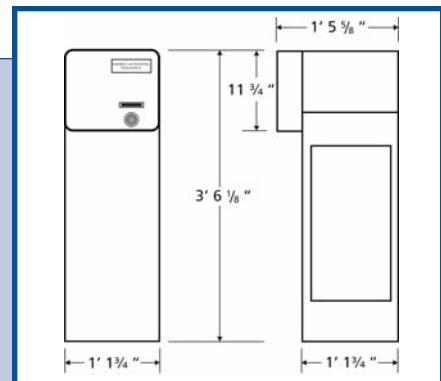

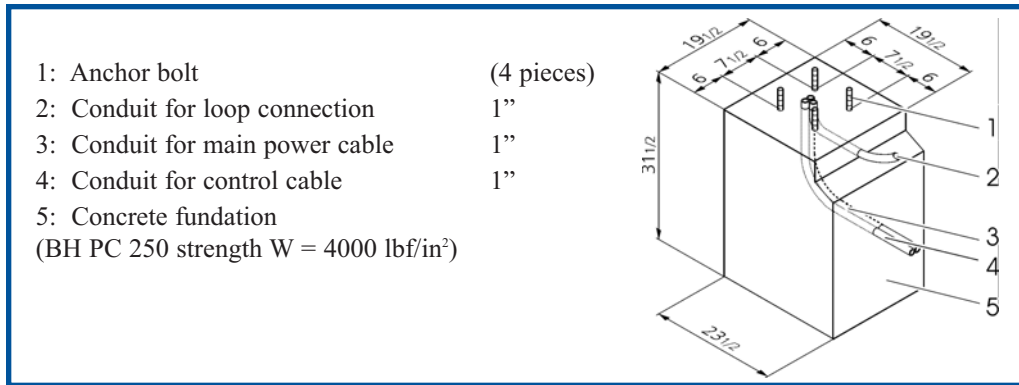


Features


- Normal time to read, verify and vend gate < 3 seconds
- Thermostatically-controlled internal environment
- Supports multiple loop configuration and directional logic
- Programmable, LCD display for messages, prompts, etc.
- Single or Bi-lingual Display
- Auto-switching Day / Night display mode
- Three different formats to select for date format
- Both 12 & 24 hour time formats
- Large front panel provides space for mounting of optional devices (*ie - intercom*).

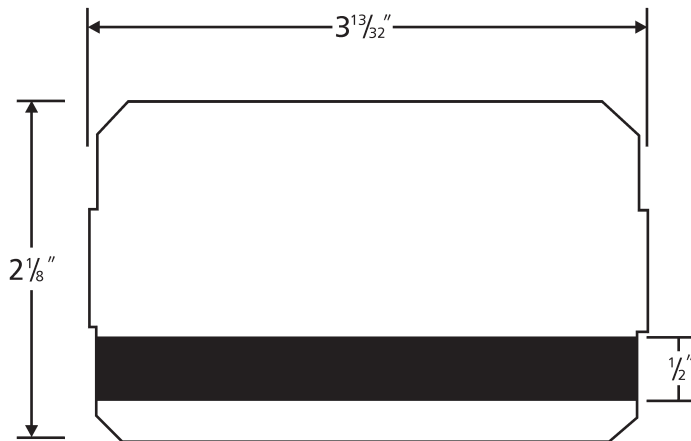

Bottom Of Ticket With 3 Track Mag-Stripe

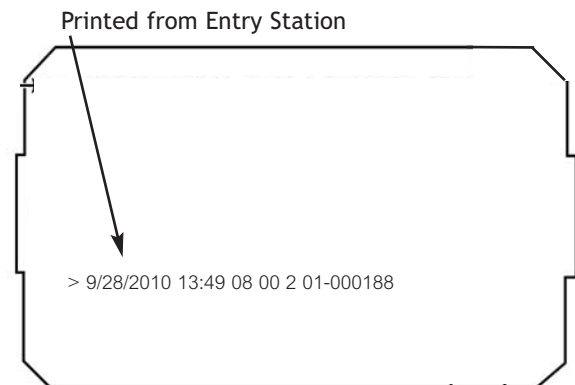

Entry Station Data Explanation

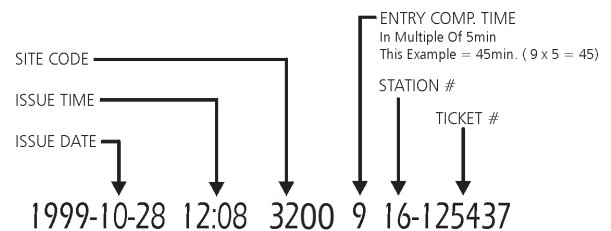

Powerful Solutions from the Parking Experts

Since 1994, T2 Systems has delivered proven parking solutions that meet the ever-changing needs of the parking industry. For more information on how T2 Systems can help you manage your parking more efficiently, call 800-434-1502 or visit us on the web at www.T2systems.com to learn more.